GRANZOW® INC.

Series H
SOLENOID VALVE

Model
H6U20-00Y

2-way, internally piloted, normally closed solenoid valve, with assisted lift

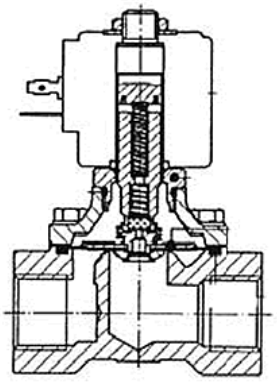

1"	1"	8.30	24 VDC	12 watts	0–22 psi
Pipe Size (Inch)	Orifice Size (Inch)	Flow Factor (CV)	Voltage (DC)	Wattage (W)	Pressure Range (PSI)

NBR + PA*	14°–195° F	Air, Inert gas, Water
Sealing Material	Temperature Range	Medium Examples

**PA = polyamide*

Materials of Construction

Body:	**Brass**
Armature Tube:	**Stainless Steel 300**
Fixed Core:	**Stainless Steel 400**
Plunger:	**Stainless Steel 400**
Spring:	**Stainless Steel 300**
Shading Ring:	**Copper**
Orifice:	**Brass**

Electrical Specifications

Rating:	**NEMA 4**

Spare Part Numbers

Kit:	**KTGHT6KOY25**
Coil:	**U2**

Valve Dimensions

Valve Width **(A)**:	**2 9/16"**
Valve Length **(B)**:	**4 3/32"**
Valve Height **(C)**:	**4 13/32"**
Coil Width **(D)**:	**1 7/16"**
Coil Length **(E)**:	**1 29/32"**
Coil Length **(F)**:	**2 3/8"**

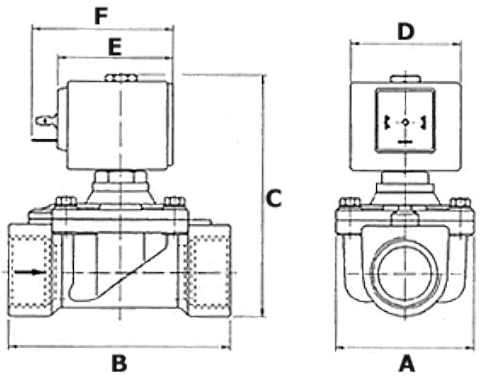

Note: Valve is pictured above with a sample coil, which may or may not reflect the exact specifications of this particular build.

Granzow, Inc.• 2300 Crownpoint Executive Drive, Charlotte, NC 28227-6702 • Phone (704) 845-2300 • Fax (704) 845-2301

©2017 Granzow, Inc. All rights reserved. Information within this document is subject to change, and may be modified at any time, without notice.